


Vinotemp®

CABINET DISASSEMBLY/REASSEMBLY

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.

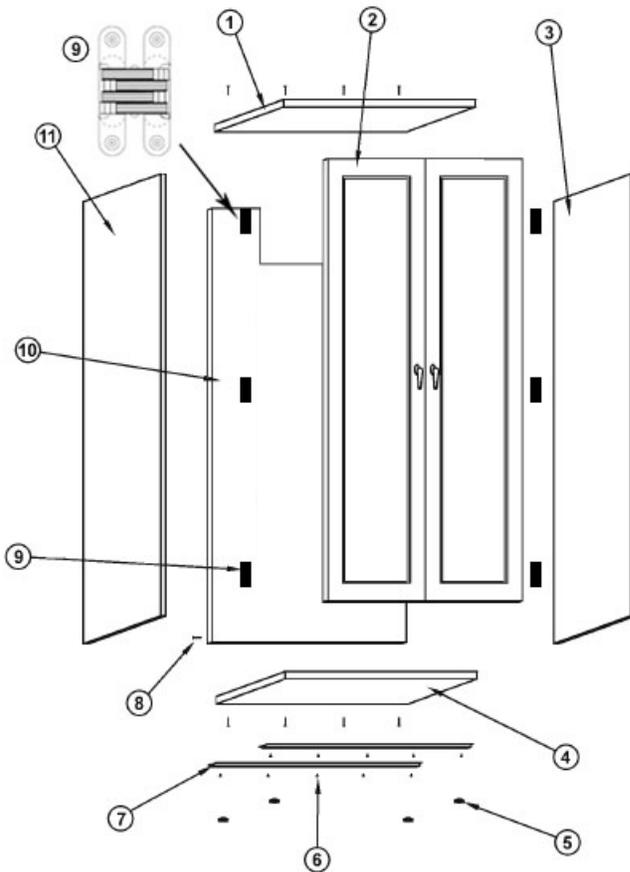

1. Top Panel
2. Door(s)
3. Right Panel
4. Bottom Panel
5. Foot
6. Screws (used for #7)
7. Leg Rail
8. Screws (used for panels)
9. Hinges
10. Rear Panel
11. Left Panel

Tools required for disassembly:

- 7/16" wrench
- Phillips screwdriver
- 4mm hex wrench (Allen wrench)
- 1/4" nut driver

Note: 2-3 people are required to complete cabinet disassembly. Remove racking first. Also, some units are equipped with a horizontal stabilizing bar which must be removed first.

DISASSEMBLY INSTRUCTIONS

1. Remove shipping carton and packing material with the exception of the pallet. Open door and remove the plastic bag containing four or six casters depending on the size of the unit. The number of casters provided will depend on the size of the unit.
2. Place the cardboard on the ground behind the wine cabinet.
3. **Removing the Cooling Unit:** Unplug the cooling unit from the cabinet. With the 7/16" wrench, remove the two bolts at the top of the cooling unit securing the cooling unit to the cabinet. Carefully slide the cooling unit out sit it aside in its upright position.
4. **Removing the Door(s):** Carefully remove the screws that are on the cabinet side of the hinges making sure someone is holding the door while screws are

being removed. Place the door on the cardboard to the side of the wine cabinet.

5. **Removing the Wine Rack:** With the Philips Head Screwdriver or 1/4" Nut Driver, carefully remove the screws located at the top back of the rack. These screws hold the bottle racks in place. (Standard Cellar Trellis Wine Racks) **Note:** Some models come with horizontal bar support (single door 440 and single door 400). This bar must be removed prior to removing the wine rack.
6. Carefully tilt the cabinet forward and place it on the cardboard packing or padding to avoid damaging the cabinet.
7. With the 4mm wrench, carefully remove the bolts on the back, top, bottom of one side at a time. Place the side panels on the cardboard. Then carefully lay the remaining cabinet (top, back and bottom) on its side. Remove the bolts holding the top from to the back of the cabinet, and lay aside. Remove the bottom from the back and lay both pieces aside.

ASSEMBLY INSTRUCTIONS

1. Install the casters all the way in on the bottom piece first.
2. To assemble your unit, follow the disassembly instructions in reverse.
3. If doors appear unaligned, level the cabinet as best possible by screwing the casters back out slowly, checking alignment with each adjustment.
4. When placing the unit in your desired location, please follow these guidelines to ensure the cooling unit properly exhausts. **Note:** Do not place anything on top of the unit.

Rear Exhaust Location

- Leave min 6" clearance from the rear to the wall.
- Leave min 12" clearance from the top to the ceiling.
- Leave min 6" clearance from the left and right sides.

Top Exhaust Location

- Leave min 12" from the top to the ceiling.
- Leave min 2" clearance from the rear to the wall.
- Leave min 2" clearance from the left and right sides.

Front Exhaust Location

- Leave min 6" clearance from the front if left and right sides unobstructed.
- Or, leave min 36" clearance from the front if left and right sides obstructed

Side Exhaust Location

- Leave min 6" clearance from the left or right side to the wall.
- Leave min 12" clearance from the top to the ceiling.

5. Your cabinet is now ready to plug into a dedicated 115V outlet. It is recommended that a separate circuit serving only your wine cabinet be provided. Do not plug your cabinet into an outlet used for other electronic items.

Note: Vinotemp applies an insulation tape in the panel joints of the cabinet that may be glue-like in appearance. If the insulation tape is damaged it should be replaced.

Questions?

Contact Vinotemp customer service at 1-800-777-8466 or info@vinotemp.com.